


# SPEC DATA SHEET QFA SERIES

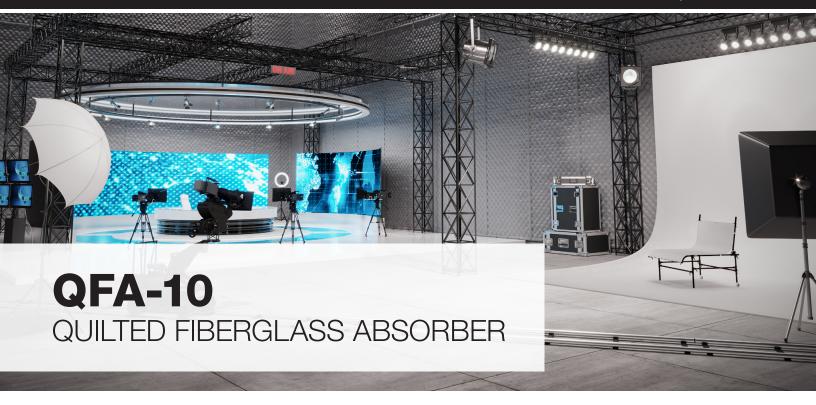

Quilted Fiberglass Sound Absorbers reduce the reflection of sound waves by adding soft, porous, open-celled materials to any environment. Sound Seal's **QFA-10** consists of a durable vinyl coated fiberglass cloth facing quilted to both sides of a two-inch thick fiberglass batting. Wall panels and overhead baffles are constructed with all edges bound and grommets across the top.

## **FEATURES:**

- Excellent acoustical performance (NRC .85)
- Class A fire rated per ASTM E-84
- Flame Spread: 17.66
- Smoke Density: 22.75
- Temperature Range: -20° to +180° F
- Weight: 0.45 lb psf
- Available in bound or unbound rolls
  @ 4' x 25'

### **APPLICATIONS:**

- Used to reduce the reverberant noise energy in an enclosure, room or building
- Can supplement plywood structures on job sites to improve transmission loss of the wood and reflected noise on the construction side







### **SPECIFICATIONS:**

Visit www.soundseal.com or call 1.800.569.1294

















| Sound Absorption Coefficients at the Octave Band Frequencies |     |     |     |     |     |     |     |
|--|-----|-----|-----|-----|-----|-----|-----|
| Frequency (Hz)   | 125 | 250 | 500 | 1K  | 2K  | 4K  | NRC |
| QFA-10   | .19 | .99 | .96 | .80 | .57 | .33 | .85 |

ASTM C 423

#### **SIZING**

All standard curtains are manufactured at 48" wide x any desired length up to 25' long with a 2" nominal thickness. Custom width panels and special options are available upon request.

#### **AVAILABLE STITCHING**

Diamond or straight-stitch pattern

### **AVAILABLE COLORS**









Color Disclaimer - Due to inconsistencies of various monitors, lighting sources, digital photography and fabric dye lot variations, we cannot guarantee that the color you see on your screen accurately portrays the true color of the product. Screen images are intended as a guide only. Swatch samples available upon request.